

Evidence of Performance

Of the physical attributes of the edge seals
of insulating glass units according to DIN EN 1279-4



Test Report
no. 17-002666-PR08
(PB-K02-09-en-02)


Client	ZHENGZHOU ZHONGYUAN SILAND HIGH TECHNOLOGY CO., LTD No. 28 Dongqing West St, Zhengzhou Hi-tech Development Zone 450001 Zhengzhou China
Product	Hot melt sealant for insulating glass
System designation	MF910H
Order	Test according to DIN EN 1279-4

Basis
DIN EN 1279-4 : 2002-10;
Glass in building – Insulating glass units;
Part 4: Methods of test for the physical attributes of edge seals.
Chapter: 5.1 Adhesion
Chapter: 5.2 Moisture vapour transmission rate
Chapter: 5.3 Gas permeation rate

Replaced Test report
No.17-002666-PR08 (PB-K02-09-en-01 dated 23.10.2017

The sealant based on M 910H, made by original client (desposited at ift), displays the following properties according to DIN EN 1279-4:

Instructions for use
This test report serves to demonstrate the physical attributes of edge seals of insulating glass units.
It serves as a basis for substitution of sealants used in insulating glass units, according to EN 1279-1.



5.1 Adhesion


The requirements of DIN EN 1279-4, chapter 5.1, stress-strain behaviour, are fulfilled



5.2 Moisture vapour transmission rate

$MVTR = (0.39 \pm 0.04) \frac{\text{Gramm H}_2\text{O}}{\text{m}^2 \cdot 24\text{h} \cdot 2\text{mm}}$

Validity
The data and results given relate solely to the tested and described specimen.



5.3 Gas permeation rate

$(1.48 \pm 0.19) \times 10^{-3} \text{ g}/(\text{m}^2 \text{ h})$

Notes on publication
The ift-Guidance Sheet 'Conditions and Guidance for the Use of ift Test Documents' applies.
The cover sheet can be used as an abstract.

ift Rosenheim
27.11.2017

Contents
The report contains a total of 12 page/s
1 Object
2 Procedure
3 Detailed results
4 Summary

Michael Freinberger *Miriam Keill*

Michael Freinberger, Dipl.-Ing. (FH)
Head of Testing Department
Material Testing

Miriam Keill, B.Eng.
Operating Testing Officer
Material Testing

1 Object

1.1 Test specimen for the adhesion test

Subject	H-specimen consisting of float glass and sealant (Fig. 1)
Manufacturer	original client (deposited at ift)
Date of manufacture	15th April 2014
Substrates A and B	Floatglas according to DIN EN 572-2
Dimensions (l x w x h) in mm	75 x 12 x 6
Sealant	
Product designation	MF910H
Type	Hot melt, basis Polyisobutylene
	Batch No. A: no further information
Manufacturer	original client (deposited at ift)
Colour	black
Dimensions (l x w x h) in mm	50 x 12 x 12

Maße in Millimeter

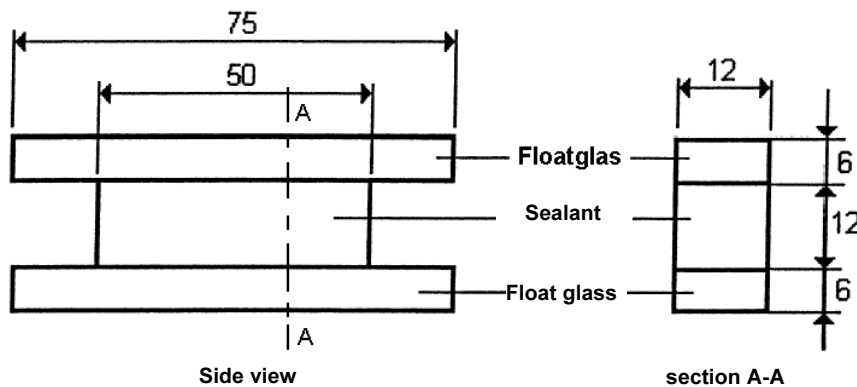


Fig. 1 Geometry of the test specimen

The physical attributes of the edge seals of insulating glass units according to DIN EN 1279-4

Test Report 17-002666-PR08 (PB-K02-09-en-02) dated 27.11.2017

Client ZHENGZHOU ZHONGYUAN SILAND HIGH TECHNOLOGY CO., LTD, 450001
Zhengzhou (China)**1.2 Test specimen for testing the moisture vapour transmission rate and the gas permeation rate**

Subject	Sealant films
Manufacturer	original client (desposited at ift)
Date of manufacture	15th April 2014
Sealant	
Product designation	MF910H
Type	Hot melt, basis Polyisobutylene
Batch No.:	no further information
Manufacturer	original client (desposited at ift)
Colour	black
Dimensions diameter in mm	Approx. 200
Thickness in mm	Approx. 1.9 ± 0.3 mm

The description is based on inspection of the test specimen at **ift**. Item designations/numbers as well as material specifications were given by the original client (desposited at ift).

2 Procedure

2.1 Sampling

The samples were selected and produced by the original client (desposited at ift).

2.1.1 Test specimen for the adhesion test

Quantity	40 pieces as shown in Fig. 1
Delivered	20th May 2014 by the original client (desposited at ift)
Registration No.	37098

2.1.2 Test specimens for testing the moisture vapour transmission rate (MVTR)

Quantity	5 films
Delivered	28th April 2014 by the original client (desposited at ift)
Registration No.	36965

2.1.3 Test specimen for testing the gas permeation rate

Quantity	5 films
Delivered	28th April 2014 by the original client (desposited at ift)
Registration No.	36965

2.2 Process

Basis

DIN EN 1279-4 : 2002-10 Glass in building – Insulating glass units.
Methods of test for the physical attributes of edge seals.
Chapter 5.1 Adhesion
Chapter 5.2 Moisture vapour transmission rate
Chapter 5.3 Gas permeation test on film

Boundary conditions According to the requirements of the standard

Deviations There have been no deviations from the test method and test conditions

- Thickness of films for the MVTR is 1.9 ± 0.3 mm (instead of 2.0 ± 0.1 mm)

2.3 Test equipment

2.3.1 Adhesion

Normal climate chamber	Appliance number: 22040
Airflow oven	Appliance number: 22159
UV source (Osram Vitalux)	Appliance number: 22604
Heatable water bath	Appliance number: 22509
Material testing machine acc. to DIN EN ISO 7500-1	Appliance number: 22933

2.3.2 Moisture vapour transmission rate

Normal climate chamber	Appliance number: 22040
Precision balance	Appliance number: 22431
Test chamber with hygrostat	Appliance number: 22589
moisture sensor	Appliance number: 22562

2.3.3 Gas permeation rate on film

Normal climate chamber	Appliance number: 22040
Gasleakage measurement device with gas chromatograph	Appliance number: 22503

2.4 Testing

Date/Period	08th May 2014 to 12th June 2014
Testing personnel	Miriam Kaube, B.Eng (FH) Stefan Schwarz Thomas Eder

3 Detailed results

3.1 Adhesion test according to DIN EN 1279-4, Chapter 5.1

Tables 1 to 4 show the results of adhesive tensile strength tests following appropriate conditioning of the test specimens. Figs. 2 to 5 show the stress-strain diagrams for new condition and for the effects of the various types of exposure, with the triangle A0B shown in each case.

Table 1 Tensile strength test in new condition following curing

Test specimen number	Force F_{max} in N	Displacements at F_{max} in mm	Stress in MPa	Strain in %	Intersection with section AB	
					Stress in MPa	Strain in %
New 1	144	3.77	0.24	31	0.24	26
New 3	137	3.42	0.23	29	0.22	27
New 4	137	3.79	0.23	32	0.22	27
New 5	142	4.33	0.24	36	0.23	27
New 6	136	3.88	0.23	32	0.22	28
Average					0.23	27

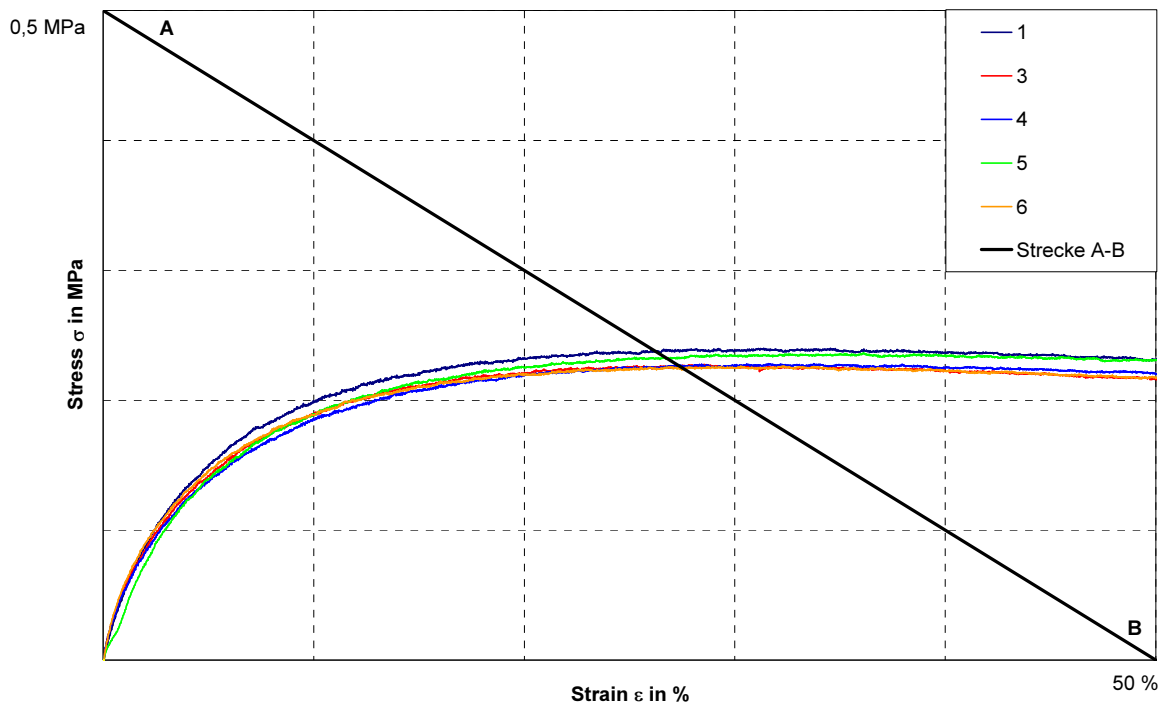


Fig. 2 Stress-strain diagram of test specimen in new condition following curing



Table 2 Tensile strength test following heat exposure 60 °C / 168 h

Test specimen number	Force F_{max} in N	Displacement s at F_{max} in mm	Stress in MPa	Strain in %	Intersection with section AB	
					Stress in MPa	Strain in %
Heat 1	133	3.89	0.22	32	0.22	28
Heat 2	127	3.78	0.21	32	0.21	29
Heat 3	130	3.77	0.22	31	0.21	29
Heat 5	123	3.23	0.20	27	0.20	30
Heat 7	132	4.00	0.22	33	0.22	28
Average					0.21	29

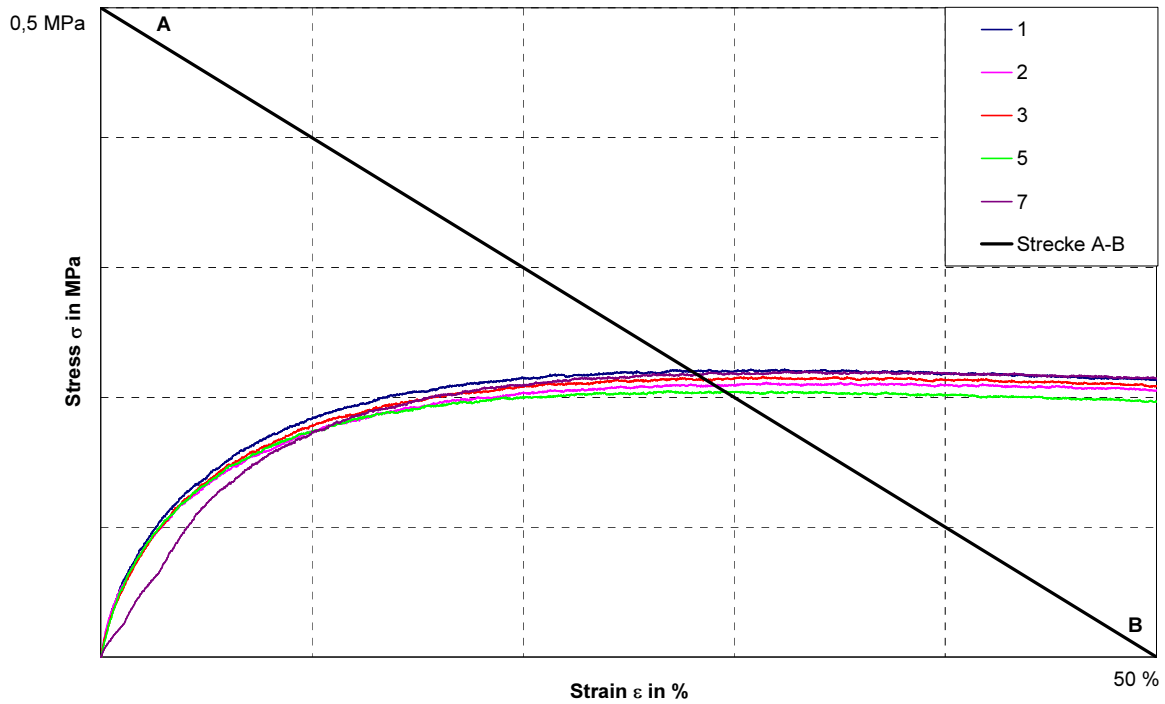


Fig. 3 Stress-strain diagram of test specimen following heat exposure



Table 3 Tensile strength test following water immersion

Test specimen number	Force F_{max} in N	Displacement s at F_{max} in mm	Stress in MPa	Strain in %	Intersection with section AB	
					Stress in MPa	Strain in %
Water 1	151	3.76	0.25	31	0.25	25
Water 2	132	3.73	0.22	31	0.22	28
Water 3	141	3.87	0.24	32	0.23	27
Water 4	140	3.90	0.23	33	0.23	27
Water 5	151	3.50	0.25	29	0.25	25
Average					0.24	26

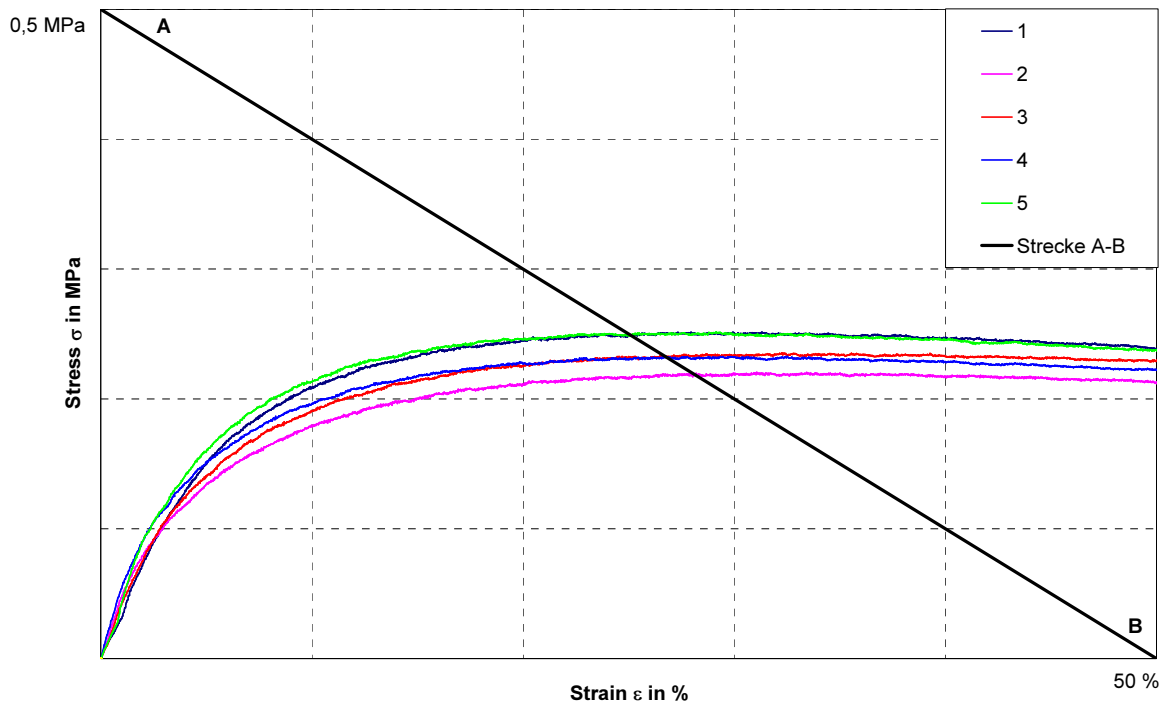


Fig. 4 Stress-strain diagram of test specimen following water immersion



Table 4 Tensile strength test following UV exposure

Test specimen number	Force F_{max} in N	Displacement s at F_{max} in mm	Stress in MPa	Strain in %	Intersection with section AB	
					Stress in MPa	Strain in %
UV 2	135	4.35	0.22	36	0.21	29
UV 3	125	3.78	0.21	31	0.22	28
UV 4	137	4.30	0.23	36	0.23	28
UV 5	138	3.84	0.23	32	0.23	27
UV 7	132	4.04	0.22	34	0.22	28
Average					0.22	28

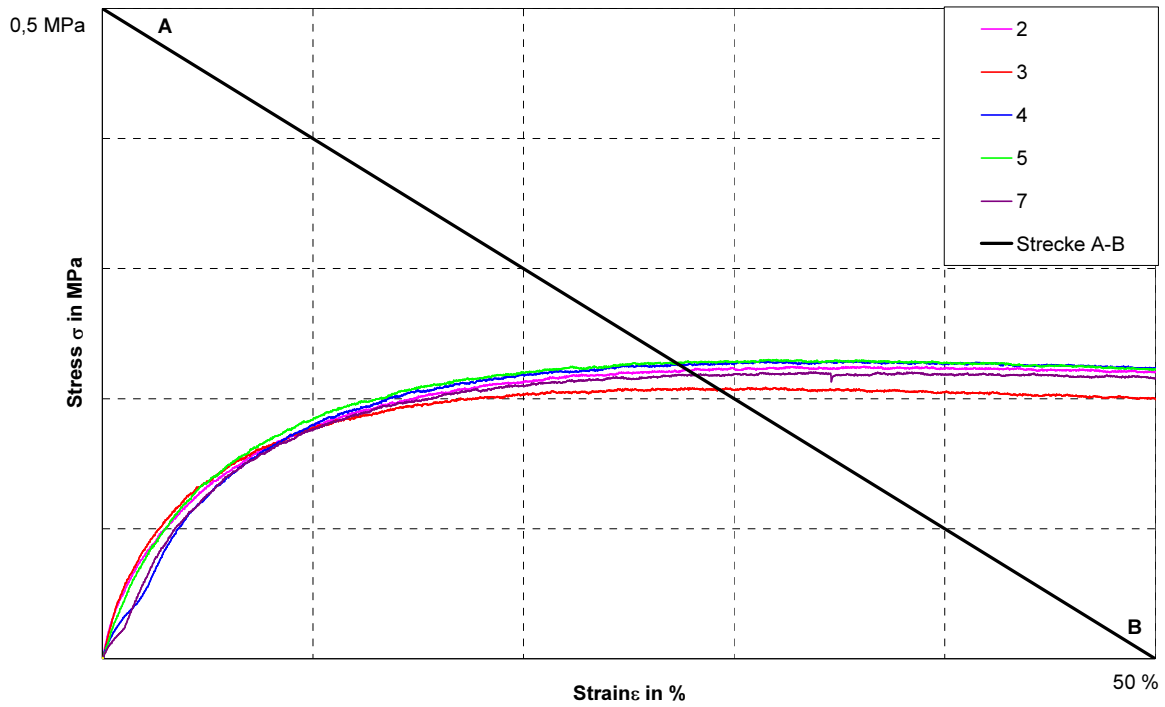


Fig. 5 Stress-strain diagram of test specimen following UV exposure



3.2 Moisture vapour transmission rate test according to DIN EN 1279-4. Chapter 5.2

Table 5 shows the moisture vapour transmission rate results for three test specimens. The moisture vapour transmission rate can be found from the gradient of the lines in the graph (Fig. 6).

The moisture vapour transmission rate is calculated according to the following formula:

$$MVTR = \frac{G}{tA} = \frac{G/t}{A}$$

G = Mass change, grams of H₂O

t = Time in days (24 h)

G/t = Gradient of the lines, grams of H₂O x (24 h)⁻¹

A = Area tested in m²

Table 5 Testing moisture vapour transmission rate on films

	Sample 1	Sample 2	Sample 3
Slope of the regression line	0.0032	0.0032	0.0032
Membrane thickness in mm	2.0	2.1	1.6
Tested area in m ²	0.0078	0.0078	0.0077
MVTR g_{H2O}/(m²*1d*2mm)	0.419	0.402	0.340
MVTR (average value)	(0.39 ± 0.04) g_{H2O}/(m²*1d*2mm)		

Error of measurement in the test procedure according to EN 1279-4, Annex C, is specified as 25 % standard deviation from the average value

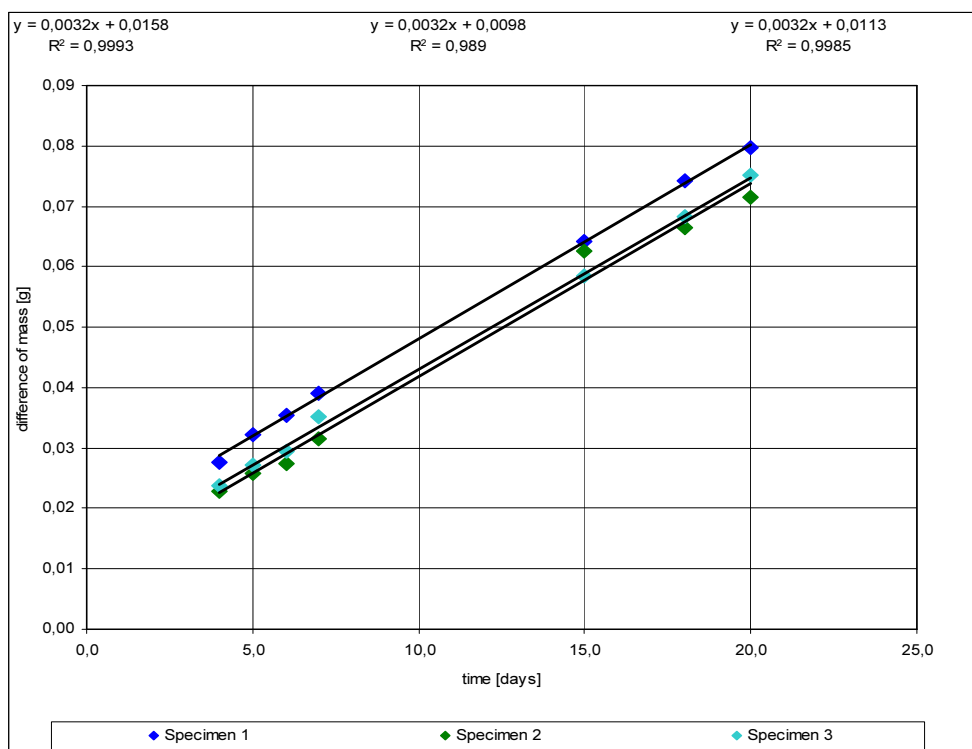


Fig. 6 Graph of the moisture vapour transmission rate of 3 test specimen

3.3 Gas permeation rate, test according to DIN EN 1279-4, Chapter 5.3

The gas permeation rate test was carried out on three test specimens. The testing area of the films was approx. 0.0046 cm². Once a constant state had been reached, the value of the average gas permeation rate for each of the films was determined on the basis of four measurements. The results are presented in table 6.

Table 6 Gas permeation rate test on films

	Gas permeation rate in g/m ² h		
	Test specimen 1	Test specimen 2	Test specimen 3
Membrane thickness in mm	1.96	1.96	2.14
Average value for the measured film	1.41 10 ⁻³	1.38 10 ⁻³	1.51 10 ⁻³
Average value for film (relating to 2 mm membrane thickness)	1.39 10 ⁻³	1.35 10 ⁻³	1.69 10 ⁻³
Average value of gas permeation rate calculated from the 3 individual values	(1.48 ± 0.19) x 10⁻³ g/(m² h)		

Error of measurement in the test procedure according to EN 1279-3 is specified as 20 % standard deviation for all individual values.

4 Evaluation and summary according to the specifications of DIN EN 1279-4

Client: ZHENGZHOU ZHONGYUAN SILAND
HIGH TECHNOLOGY CO., LTD
No. 28 Dongqing West St,
Zhengzhou Hi-tech Development Zone
450001 Zhengzhou
China

Sealant specification: MF910H

Glass specification: Floatglas according to DIN EN 572-2

4.1 Adhesion test

Table 7 Summary of results

Tested strength of edge seal	at the intersection with line A-B (EN 1279-4. Fig. 1)		Failure pattern						
	Average stress σ_{av} in MPa	Average strain ε_{av} in %	k = cohesive oA = no evaluation						
Adhesion			1	2	3	4	5	6	7
After curing	0.23	27	k	oA	k	k	k	k	oA
After heat exposure 60 °C	0.21	29	k	k	k	oA	k	oA	k
After water immersion	0.24	26	k	k	k	k	k	oA	oA
After UV exposure	0.22	28	oA	k	k	k	k	oA	k

4.2 Moisture vapour transmission rate test

Film thickness	Based on a thickness of 2 mm
ΔP_{H_2O}	Initial load on desiccant 3.3 %; Climatic chamber average 99.9 %rh; $\Delta P_{H_2O} = 96.6 \%$
Temperature	(23±1) °C
Moisture vapour transmission rate	(0.39 ± 0.04) $\frac{\text{Gramm H}_2\text{O}}{\text{m}^2 \cdot 24\text{h} \cdot 2\text{mm}}$

4.3 Gas permeation rate test

Film thickness	Based on a thickness of 2 mm
Surface	Average approx. 0.0046 m ²
Gas permeation rate	(1.48 ± 0.19) × 10⁻³ g/(m² h)

Result of the testing of the strength of the edge seal:

The sealant MF910H, made by original client (desposited at ift)
fulfils the criteria: **YES**